

6 HOLES EQUISPACED ON PCD 50 WITH LIP TO LOCATE $\phi 3$ Al_2O_3 LINER

6 HOLES $\phi 1.6$ ON PCD 50


(21) 18/8 S

ALTERNATI

(14) STAINLESS STEEL (18/8)

FOR USE WITH 1MM THICK PSZ INSULATORS UNDER CONNECTORS

ALTERNATIVELY: ~~PSZ WITH GROOVE 57.5 OD x 42.5 ID x 6 DEEP & PLAIN HOLES $\phi 1.6$~~

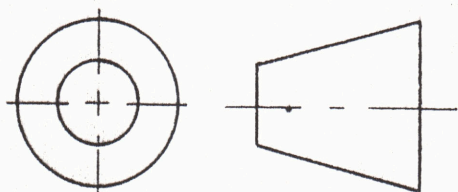

Stainless steel version of
 DRG : 3106 REV - (14)

DIMENSIO
TOLERANC